


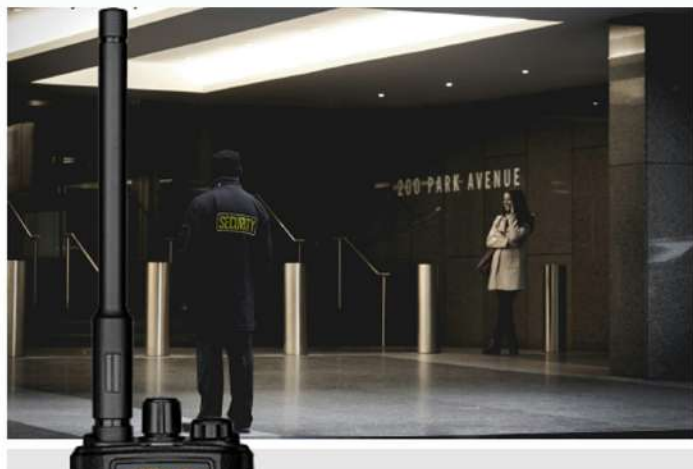

-  Type-C Charging (optional)
-  Flashlight
-  Built-in display (optional)

CD2000

Output Power: 5W/1W

Frequency Range: VHF:136-174MHz or
UHF:400-480MHz

Battery Capacity: 2500mAh

Channel Spacing: 16

Item Dimensions: 119×54×37mm

Working Time(5:5:9): 15h

Product Show



Technical Data:

SPECIFICATION		TRANSMITTER		RECEIVER	
Frequency Range	VHF:136-174MHz or UHF:400-480MHz	Output Power	5W	RF Sensitivity	≤0.25uV / ≤0.3uV
Channel Spacing	16	Current	≤2.5A	Silent Sensitivity	≤0.2uV/ ≤0.25uV
Memory Channel	12.5 KHz / 25 KHz	Modulation Distortion	< 5%(300-3000Hz)	Audio Frequency Power	≥300mW
Rated Voltage	7.4V DC	Maximum Frequency Deviation	≤5KHz / ≤2.5KHz	Audio Distortion	≤5%
Battery Capacity	2500mAh	CTCSS Frequency Deviation	0.75KHz±50Hz	Modulation Receiver Bandwidth	±7KHz
Frequency Sensitivity	±2.5ppm	Remanent Radiation	≤7uW	Spurious Rejection	≥55dB
Antenna Impedance	50Ω	Modulation Mode	16K0F3E/11K0F3E	Selectivity	≥65dB
Dimension	119x54x37 mm (Without Antenna)	Remanent Modulation	≤-35dB	Intermodulation	≥60dB